

CXBC-500S

IP over Coax 5MP UHD IR Bullet 4X Motorized Lens IP Real-time Camera

Coaxia




Specification

CXBC-500S	
Camera	
Image Sensor	1/2.8" Sony IMX335 Low light CMOS sensor
Effective Pixels	5 Megapixels 2592(H)×1944 (V)
Electronic Shutter	AUTO, 1/25s ~ 1/100000s
Day/Night	Auto/Color/(B/W)/Timing
Min. Illumination	0.01Lux@F1.2(AGC ON), 0Lux IR on
WDR	Digital WDR
White Balance	Auto
AGC/BLC/HLC	Support
DNR	2D/3D DNR
Focal length	2.8-12mm AF Motorized Lens
IR Led	4 pcs new array IR Leds
IR Distance	70-80 M
Other	Multi-lines OSD, Motion Detection, Privacy Mask, Mirror
Encode (Video & Audio)	
Video Standard	H.265/H.264
Video Resolution	MainStream: 30fps@5MP(2592x1944), 30fps@4MP/3MP, 30fps@1080P/720P Sub stream: 30fp@D1/VGA(640x480)/360P/QVGA s
Video Bitrates	32Kbps - 8Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a
OSD Overlay	Title and Time overlay
EoC Services	
Protocol	IEEE802.3-2012
PoC	Power over Coax 57VDC
Thruput	10 or 100Mps selection (Factory default @ 100Mbps)
Receiver	ECP-01R, ECP-101R, ECP-08R, Etc
Network Services	
Protocol	HTTP/RTSP/FTP/NFS/SMTP/DHCP/NTP, etc.
P2P	Yes
Web	IE, Firefox, etc.
Media	CMS, Android, IOS
ONVIF	17.06 compatible
General	
Network Port	BNC Female
Power Supply	PoC or 57 VDC ± 10%
Power Consumption	< 10 W
Operating Temp.	-30°C-(+60)°C, 10%-90%RH
Size	φ89.9 x 286.8mm
Language Support	English, Korean
PoE, Audio, Alarm In/Out, SD card, etc.	

Features

- ECP-01R, ECP-101R, ECP-08R, etc can be used as receiver
- Ethernet over Coax communication following IEEE802.3-2012 standard
- Intercoax unique Data + Power over Coax up to 700m
- 1/2.8" Sony IMX335 Low light CMOS sensor
- Max. 5MP Real-time 30fps resolution 2592 x 1944 output
- Ultra low illumination 0.01Lux
- Day/Night (ICR), AWB, 2D/3D-DNR, IR-CUT
- D-WDR, Motion Detection, Privacy Mask, Mirror
- RTSP and Onvif 17.06 compatible
- H.265/H.264 dual-stream media server
- Easy-to-use P2P Cloud service
- Multi web browser, PC Client, mobile APP remote access
- Korean OSD available
- Lightning protection 4000V
- Strong water-proof housing, IP66
- 4pcs Array IR Leds, IR distance 70-80 meters
- HD 2.8-12mm AF Motorized lens
- Plug and Play

Connection Diagram

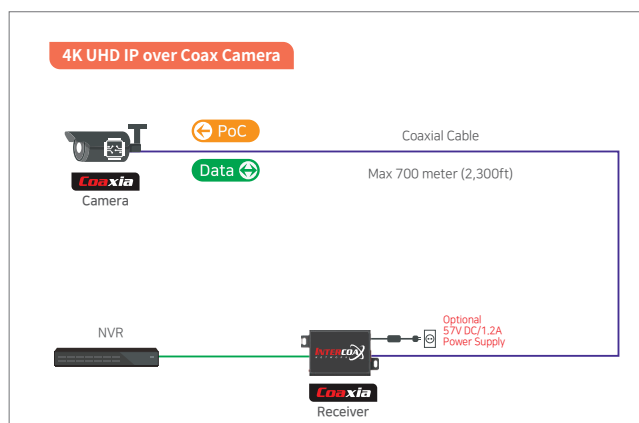

Dimension

