

## IX-NYU-108


▶ 8-ch 1-SATA Ultra 265/H.265/H.264 NVR



## ▲ 제품 특징

- Ultra 265/H.265/H.264
- 8ch 입력
- Onvif Profile S, Profile G, Profile T
- 1-ch HDMI, 1-ch VGA
- 최대 4K 해상도 녹화가능
- SATA HDD 1대 최대 8TB
- 클라우드 업그레이드 지원

## ▲ 외관도

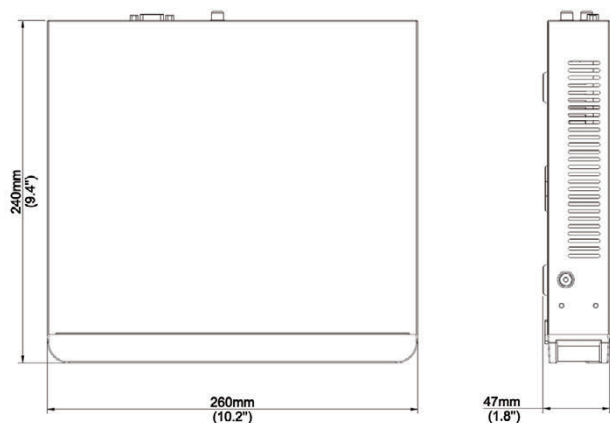

## ▲ 제품 사양

Model	IX-NYU-108
<b>Video/Audio Input</b>	
IP영상입력	8-ch
양방향 오디오 입력	1-ch, 3.5mm
<b>Network</b>	
수신대역폭	64Mbps
출력대역폭	48Mbps
원격사용자	128
프로토콜	P2P, UPnP, NTP, DHCP, PPPoE
<b>Video/Audio Output</b>	
HDMI/VGA 출력	HDMI:4K (3840x2160@30), 1920X1080@60, 1920X1080@50, 1600X1200@60, 1280X1024@60, 1280X720@60, 1024X768@60 VGA:1920X1080@60, 1920X1080@50, 1280X1024@60, 1280X720@60, 1024X768@60
녹화해상도	4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
오디오 출력	1-ch, 3.5mm
동시재생	8-ch
복도모드	3/4/5/7/9
CVBS 출력	-
<b>Decoding</b>	
Decoding format	Ultra265/H.265/H.264
Live view/Playback	4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Capability	1 x 4K@30, 4 x 5MP@25, 4 x 4MP@25, 5 x 3MP@25, 8 x 1080p@30, 16 x 720p@30
<b>Hard Disk</b>	
SATA	1 SATA interfaces
Capacity	up to 8TB for each disk
Disk Array Type	-
eSATA	-
miniSAS	-
<b>External Interface</b>	
Network Interface	1 RJ45 10M/100M self-adaptive Ethernet Interface
USB Interface	Rear panel: 2 x USB2.0
Alarm 입력	-
Alarm 출력	-
Serial Interface	-
USB Interface	-
Decoding Card (Optional)	-
전원출력	-
<b>PoE</b>	
Interface	-
Max Power	-
Supported Standard	-
<b>General</b>	
Power Supply	12V DC Power Consumption: ≤ 5W (without HDD)
동작환경	-10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH (non-condensing)
외형치수(W×D×H)	260mm × 240mm × 47mm (10.2"×9.4"×1.8 ")
중량 ( without HDD )	1kg (2.20 lb)
Chassis	-