

## IX-NYU-832


▶ 32-ch 8-SATA Ultra 265/H.265/H.264 NVR



## ▲ 제품 특징

- Ultra 265/H.265/H.264
- 32ch 입력
- Onvif Profile S, Profile G, Profile T
- 1-ch HDMI1 & HDMI2, 1-ch VGA
- 최대 12MP 해상도 녹화가능
- SATA HDD 8대 최대 8TB
- 클라우드 업그레이드 지원
- RAID 0, 1, 5, 6, 10 지원

## ▲ 외관도

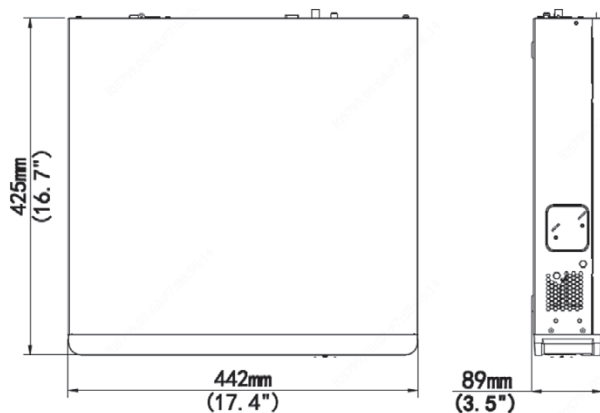

## ▲ Specification

Model	IX-NYU-832
Video/Audio Input	
IP영상입력	32-ch
양방향 오디오 입력	1-ch, RCA
Network	
수신대역폭	384Mbps
출력대역폭	384Mbps
원격사용자	128
프로토콜	P2P, UPnP, NTP, DHCP, PPPoE
Video/Audio Output	
HDMI/VGA 출력	HDMI1/VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz HDMI2: 4K(3840x2160)/60Hz, 4K(3840x2160)/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
녹화해상도	12MP/4K/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
오디오 출력	1-ch, RCA
동시재생	16-ch
복도모드	3/4/5/7/9/10/12/16/32
CVBS 출력	-
Decoding	
Decoding format	Ultra265/H.265/H.264
Live view/Playback	12MP/4K/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Capability	2 x 12MP@30, 4 x 4K@30, 8 x 4MP@30, 9 x 4MP@25, 16 x 1080p@30
Hard Disk	
SATA	8 SATA interfaces
Capacity	up to 8TB for each disk
Disk Array Type	RAID 1, 5
eSATA	1 eSATA interface
miniSAS	-
External Interface	
Network Interface	2 RJ45 10M/100M/1000M self-adaptive Ethernet Interfaces
USB Interface	Front panel: 2 x USB2.0, Rear panel: 1 x USB3.0
Alarm 입력	16-ch
Alarm 출력	4-ch
Serial Interface	1 x RS232, 1 x RS485
USB Interface	Front panel: 2 x USB2.0, Rear panel: 1 x USB3.0
Decoding Card (Optional)	-
전원출력	-
PoE	
Interface	-
Max Power	-
Supported Standard	-
General	
Power Supply	100~240 VAC Power Consumption: ≤ 25 W(without HDD)
동작환경	-10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH (non-condensing)
외형치수(W×D×H)	442mm × 425mm × 89mm (17.4" × 16.7" × 3.5")
중량 ( without HDD )	≤ 5.7Kg (12.57lb)
Chassis	-