

# IX-NYU-864


▶ 64-ch 8-SATA Ultra 265/H.265/H.264 NVR



## ▲ Features

- Ultra 265/H.265/H.264
- 64ch input
- Onvif Profile S, Profile G, Profile T
- 1-ch HDMI1 & HDMI2, 1-ch VGA
- Max. 12MP Recording
- 8 HDD Max. 8TB
- Cloud Upgrade
- RAID 0, 1, 5, 6, 10 support

## ▲ Dimension

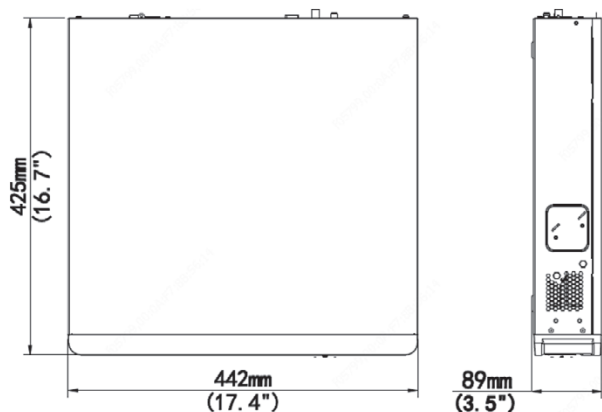

## ▲ Specification

Model	IX-NYU-864
<b>Video/Audio Input</b>	
IP Video Input	64-ch
Two-way Audio Input	1-ch, RCA
<b>Network</b>	
Incoming Bandwidth	320Mbps
Outgoing Bandwidth	320Mbps
Remote Users	128
Protocols	P2P, UPnP, NTP, DHCP, PPPoE
<b>Video/Audio Output</b>	
HDMI/VGA Output	HDMI1/VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz HDMI2: 4K(3840x2160)/60Hz, 4K(3840x2160)/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
Recording Resolution	4K/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Audio Output	1-ch, RCA
Synchronous Playback	16-ch
Corridor Mode Screen	3/4/5/7/9/10/12/16
CVBS Output	-
<b>Decoding</b>	
Decoding format	Ultra265/H.265/H.264
Live view/Playback	12MP/4K/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Capability	2 x 12MP@30, 4 x 4K@30, 8 x 4MP@30, 9 x 4MP@25, 16 x 1080p@30, 32 x 960p@25
<b>Hard Disk</b>	
SATA	8 SATA interfaces
Capacity	up to 8TB for each disk
Disk Array Type	RAID 1, 5
eSATA	1 eSATA interface
miniSAS	-
<b>External Interface</b>	
Network Interface	2 RJ45 10M/100M/1000M self-adaptive Ethernet Interfaces
USB Interface	Front panel: 2 x USB2.0, Rear panel: 1 x USB3.0
Alarm input	16-ch
Alarm Output	4-ch
Serial Interface	1 x RS232, 1 x RS485
USB Interface	Front panel: 2 x USB2.0, Rear panel: 1 x USB3.0
Decoding Card (Optional)	-
Power Output	-
<b>PoE</b>	
Interface	-
Max Power	-
Supported Standard	-
<b>General</b>	
Power Supply	100~240 VAC Power Consumption: ≤ 25 W(without HDD)
Working Environment	-10°C ~ +55°C (+14°F ~ +131°F), Humidity ≤ 90% RH (non-condensing)
Dimensions(W×D×H)	442mm × 426mm × 89mm (17.4" × 16.8" × 3.5")
Weight (without HDD)	≤ 5.7Kg (12.57lb)
Chassis	-