

IX-NYU-1664


▶ 64-ch 16-SATA Ultra 265/H.265/H.264 NVR



Features

- Ultra 265/H.265/H.264
- 64ch input
- Onvif Profile S, Profile G, Profile T
- 2-ch HDMI, 1-ch VGA, HDMI at up to 4
- Max. 12MP Recording
- 16 HDD Max. 8TB
- Cloud Upgrade
- RAID 0, 1, 5, 6, 10, 50, 60 support
- 2 Decoding Card(optional), Max.12-ch HDMI Display
- HDD Hot Swap support
- 2 miniSAS Support
- 12V Power Output support
- N + 1 Hot Spare support
- Redundant Power Supply(Optional)

Dimension

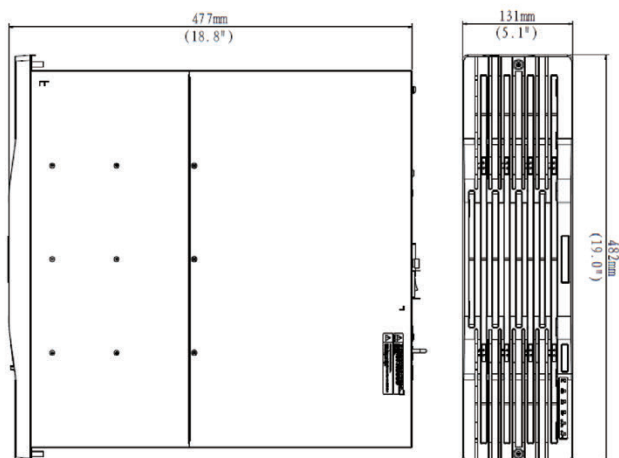

Specifications

Model	IX-NYU-1664
Video/Audio Input	
IP Video Input	64-ch
Two-way Audio Input	1-ch, BNC
Network	
Incoming Bandwidth	384Mbps
Outgoing Bandwidth	384Mbps
Remote Users	128
Protocols	P2P, UPnP, NTP, DHCP, PPPoE
Video/Audio Output	
HDMI/VGA Output	VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz HDMI1: 4K (3840x2160)/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz HDMI2: 4K (3840x2160)/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Audio Output	1-ch, BNC
Synchronous Playback	16-ch
Corridor Mode Screen	3/4/5/7/9/10/12/16/32
CVBS Output	-
Decoding	
Decoding format	Ultra265/H.265/H.264
Live view/Playback	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Capability	4 x 12MP@20, 4 x 4K@30, 16 x 1080p@30, 36 x 720p@30, 64 x D1
Hard Disk	
SATA	16 SATA interfaces
Capacity	up to 8TB for each disk
Disk Array Type	RAID 0/1/5/6/10/50/60
eSATA	1 eSATA interface
miniSAS	2 miniSAS ports
External Interface	
Network Interface	4 RJ-45 10M/100M/1000M adaptive Ethernet Interface 2 1000M SFP Ethernet Interface
USB Interface	Rear panel: 4 x USB3.0
Alarm input	24-ch
Alarm Output	8-ch
Serial Interface	1 x RS232, 1 x RS485
USB Interface	Rear panel: 4 x USB3.0
Decoding Card (Optional)	2 slots (4-ch HDMI or 6-ch HDMI outputs per card)
Power Output	12V
PoE	
Interface	-
Max Power	-
Supported Standard	-
General	
Power Supply	100~240 VAC Power Consumption: ≤ 50 W(without HDD)
Working Environment	-10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH (non-condensing)
Dimensions(W×D×H)	482mm × 477mm × 131mm (18.8" × 19.0" × 5.1")
Weight (without HDD)	≤ 10 Kg (22.05 lb)
Chassis	19-inch rack-mounted 3U chassis