

IX-NYU-16128


▶ 128-ch 16-SATA Ultra 265/H.265/H.264 NVR



▲ Features

- Ultra 265/H.265/H.264
- 128ch input
- Onvif Profile S, Profile G, Profile T
- HDMI1, HDMI2 and VGA independent outputs
- Max. 12MP Recording
- 16 HDD Max. 8TB
- Cloud Upgrade
- RAID 0, 1, 5, 6, 10, 50, 60 support
- 2 Decoding Card(optional), Max.12-ch HDMI Display
- HDD Hot Swap support
- 2 miniSAS Support
- 12V Power Output support
- N + 1 Hot Spare support
- Redundant Power Supply(Optional)

▲ Dimension

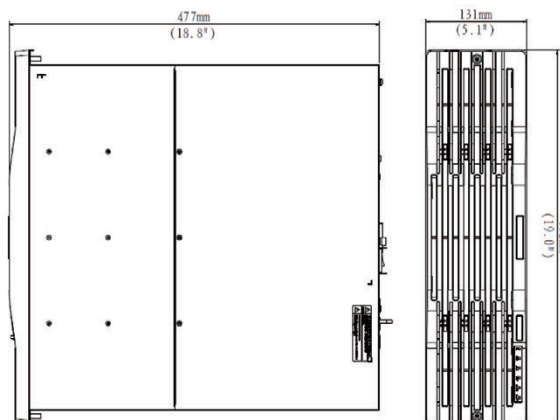

▲ Specifications

| Model | IX-NYU-16128 |
|---------------------------|---|
| Video/Audio Input | |
| IP Video Input | 128-ch |
| Two-way Audio Input | 1-ch, BNC |
| Network | |
| Incoming Bandwidth | 512Mbps |
| Outgoing Bandwidth | 384Mbps |
| Remote Users | 128 |
| Protocols | P2P, UPnP, NTP, DHCP, PPPoE |
| Video/Audio Output | |
| HDMI/VGA Output | VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz HDMI1: 4K (3840x2160)/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz HDMI2: 4K (3840x2160)/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz |
| Recording Resolution | 12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF |
| Audio Output | 1-ch, BNC |
| Synchronous Playback | 16-ch |
| Corridor Mode Screen | 3/4/5/7/9/10/12/16/32 |
| CVBS Output | - |
| Decoding | |
| Decoding format | Ultra265/H.265/H.264 |
| Live view/Playback | 12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF |
| Capability | 4 x 12MP@20, 4 x 4K@30, 16 x 1080p@30, 36 x 720p@30, 64 x D1 |
| Hard Disk | |
| SATA | 16 SATA interfaces |
| Capacity | up to 8TB for each disk |
| Disk Array Type | RAID 0/1/5/6/10/50/60 |
| eSATA | 1 eSATA interface |
| miniSAS | 2 miniSAS ports |
| External Interface | |
| Network Interface | 4 RJ-45 10M/100M/1000M adaptive Ethernet Interface 2 1000M SFP Ethernet Interface |
| USB Interface | Rear panel: 1 x USB2.0, 1 x USB3.0 Front panel: 1 x USB2.0 |
| Alarm input | 24-ch |
| Alarm Output | 8-ch |
| Serial Interface | 1 x RS232, 1 x RS485 |
| USB Interface | Rear panel: 4 x USB3.0 |
| Decoding Card (Optional) | 2 slots (4-ch HDMI or 6-ch HDMI outputs per card) |
| Power Output | 12V |
| PoE | |
| Interface | - |
| Max Power | - |
| Supported Standard | - |
| General | |
| Power Supply | 100~240 VAC Power Consumption: ≤ 50 W(without HDD) |
| Working Environment | -10°C ~ +55°C (+14°F ~ +131°F), Humidity ≤ 90% RH (non-condensing) |
| Dimensions(W×D×H) | 482mm × 477mm × 131mm (18.8" × 19.0" × 5.1") |
| Weight (without HDD) | ≤ 10 Kg (22.05 lb) |
| Chassis | 19-inch rack-mounted 3U chassis |