

## IX-NYU-16128


▶ 128-ch 16-SATA Ultra 265/H.265/H.264 NVR



## ▲ 제품 특징

- Ultra 265/H.265/H.264
- 128ch 입력
- Onvif Profile S, Profile G, Profile T
- HDMI1, HDMI2 and VGA independent outputs
- Max. 12MP Recording
- SATA HDD 16대 최대 8TB
- 클라우드 업그레이드 지원
- RAID 0, 1, 5, 6, 10, 50, 60 지원
- 2 Decoding Card(optional), Max.12-ch HDMI Display
- HDD Hot Swap 지원
- 2 miniSAS 지원
- 12V Power Output 지원
- N + 1 Hot Spare 지원
- Redundant Power 지원(Optional)

## ▲ 외관도

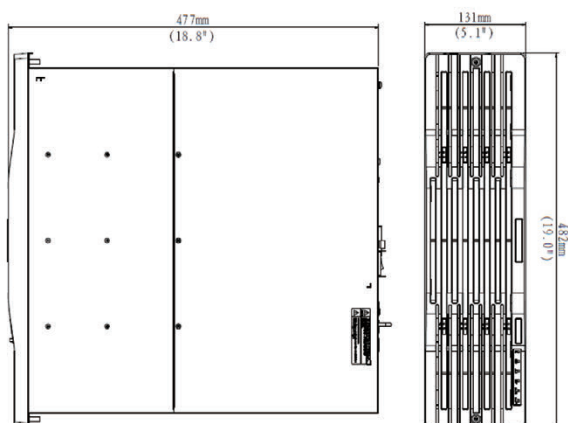

## ▲ 제품 사양

Model	IX-NYU-16128
Video/Audio Input	
IP영상입력	128-ch
양방향 오디오 입력	1-ch, BNC
Network	
수신대역폭	512Mbps
출력대역폭	384Mbps
원격사용자	128
프로토콜	P2P, UPnP, NTP, DHCP, PPPoE
Video/Audio Output	
HDMI/VGA 출력	VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz HDMI1: 4K (3840x2160)/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz HDMI2: 4K (3840x2160)/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
녹화해상도	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
오디오 출력	1-ch, BNC
동시재생	16-ch
복도모드	3/4/5/7/9/10/12/16/32
CVBS 출력	-
Decoding	
Decoding format	Ultra265/H.265/H.264
Live view/Playback	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Capability	4 x 12MP@30, 4 x 4K@30, 16 x 1080p@30, 36 x 720p@30, 64 x D1
Hard Disk	
SATA	16 SATA interfaces
Capacity	up to 8TB for each disk
Disk Array Type	RAID 0/1/5/6/10/50/60
eSATA	1 eSATA interface
miniSAS	2 miniSAS ports
External Interface	
Network Interface	4 RJ-45 10M/100M/1000M adaptive Ethernet Interface 2 1000M SFP Ethernet Interface
USB Interface	Rear panel: 1 x USB2.0, 1 x USB3.0 Front panel: 1 x USB2.0
Alarm 입력	24-ch
Alarm 출력	8-ch
Serial Interface	1 x RS232, 1 x RS485
USB Interface	Rear panel: 4 x USB3.0
Decoding Card (Optional)	2 slots (4-ch HDMI or 6-ch HDMI outputs per card)
전원출력	12V
PoE	
Interface	-
Max Power	-
Supported Standard	-
General	
Power Supply	100~240 VAC Power Consumption: ≤ 50 W(without HDD)
동작환경	-10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH (non-condensing)
외형치수(W×D×H)	482mm × 477mm × 131mm (18.8" × 19.0" × 5.1")
중량 ( without HDD )	≤ 10 Kg (22.05 lb)
Chassis	19-inch rack-mounted 3U chassis