

# CXBB-500S

5MP UHD Coaxia Fixed Bullet Camera

**Coaxia**




## Specification

CXBB-500S	
<b>Camera</b>	
Image Sensor	1/2.8" SONY CMOS
Effective Pixels	2592 (H) × 1944 (V)
Electronic Shutter	Auto, 1/25s ~ 1/100000s
Min. Illumination	0.01Lux@F1.2(AGC ON), 0Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR & HDR
White Balance	Auto
BLC	Support
DNR	2D/3D DNR
Function	Motion Detection, Privacy Masking, Flip, Mirror
<b>Video</b>	
Video Compression	H.265/H.264
Video Resolution	Main Stream:30fps@5MP(2592x1944)/4MP/3MP/1080P/720P Sub Stream:30fp@D1/VGA(640x480)/360P/QVGAs
Video Bitrates	32Kbps - 8Mbps, VBR/CBR
Audio Compression	G.711-u/G.711-a
OSD Overlay	Title and Time Overlay
<b>IR LED</b>	
IR LED	20PCS SMD IR Leds
IR Distance	30-35m
<b>Lens</b>	
Lens	2.8mm Fixed Lens
<b>Network</b>	
Protocol	HTTP/RTSP/FTP/SMTP/DHCP/NTP/NFS, etc.
P2P	Support
Web	Edge, Chrome, Firefox
Media	CMS, Android, IOS
ONVIF	17.06 compatible
<b>General</b>	
Network Port	1-RJ45, 100Mbps, POE
Power Supply	12 VDC ± 10%
Power Consumption	< 12W
Operating Temperature & Humidity	-30°C-(+60)°C, 10%-90%RH
IK Rating	-
Ingress Protection	IP66
Dimension	Φ82.9(mm)×276.5(mm)
<b>EOC</b>	
Protocol	IEEE802.3-2012
PoC	Power over Coax 57VDC
Bandwidth	10Mbps or 100Mbps Optional (Default 100Mbps)
Applicable RX	ECP-01R, ECP-101R, ECP-08R
Transmission Distance	700m

## Features

- H.265/H.264
- 5MP(2592 x 1944)
- 2.8mm Fixed Lens
- IR 20pcs, Distance 30-35m
- DWDR/DHDR
- Motion Detection, Privacy Masking, Flip, Mirror
- IP66
- ECP Series Max. 700m BNC 1:1 TX Integrated
- NDAA Compliant

## Connection Diagram

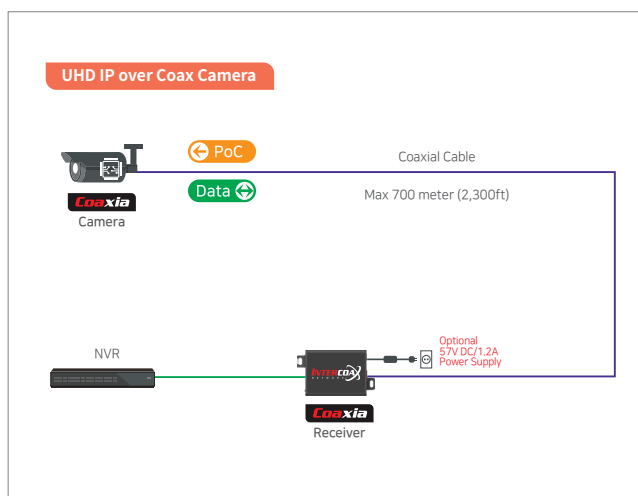

## Dimension

